WAAS	APP CRS	Rwy Idg	4866
CH 58314	311°	TDZE	1449
W31A		Apt Elev	1456

RNAV (GPS) RWY 31

DEVILS LAKE RGNL (DVL)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. For inoperative MALSR, increase visibility LNAV Cat D 1¼ mile. When local altimeter setting not received, use Jamestown altimeter setting and increase all DA 172 feet, all MDA 180 feet, increase LPV all Cats visibility ½ mile, LNAV/VNAV all Cats ¾ mile, LNAV Cat C ½ mile, Cat D ¼ mile, circling Cats C and D½ mile. Baro-VNAV and VDP NA when using Jamestown altimeter setting. For inoperative MALSR, when using Jamestown altimeter setting, increase LPV all Cats visibility to 1½ mile.

MALSR

MISSED APPROACH: Climb to 3600 direct KRAMR and left turn via Track 214° to SCULY and hold.

AWOS-3	GRAND FORKS RADIO	UNICOM
125.875	122.3	122.8 (CTAF) L

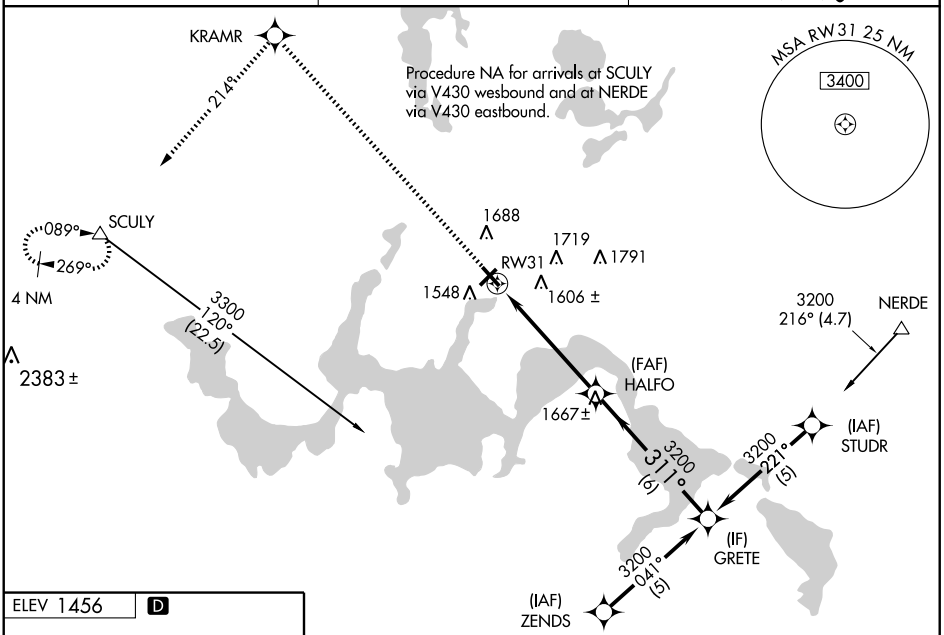

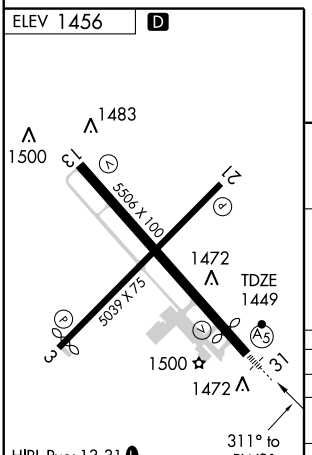

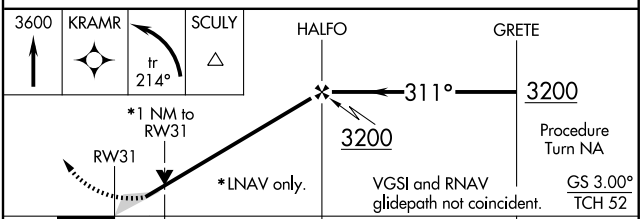

CATEGORY	A	B	C	D
LPV DA	1699-½ 250 (300-½)			
LNAV/VNAV DA	1907-1 458 (500-1)			
LNAV MDA	1800-½ 351 (400-½)			1800-1 351 (400-1)
CIRCLING	2000-1 544 (600-1)		2000-1½ 544 (600-1½)	2080-2 624 (700-2)

NC-1, 12 JAN 2012 to 09 FEB 2012
NC-1, 12 JAN 2012 to 09 FEB 2012