

# RNAV (GPS) RWY 9




SAGINAW COUNTY H. W. BROWNE (HYX)

WAAS CH <b>50200</b> <b>W09A</b>	APP CRS <b>094°</b>	Rwy Idg TDZE Apt Elev	<b>5000</b> <b>600</b> <b>601</b>
--	------------------------	-----------------------------	---


**⚠** Circling to Rwy 5 NA at night. When local altimeter setting not received, use Saginaw MBS Intl altimeter setting and increase all DA 36 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ mile, increase all MDA 40 feet, increase LNAV visibility Cat C ¼ mile and Circling visibility Cat C ¼ mile. VDP and Baro-VNAV NA when using Saginaw MBS Intl altimeter setting. For uncompensated Baro-VNAV system, procedure NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.

**MISSED APPROACH:**  
Climb to 2700 direct IVODY and hold.

AWOS-3 <b>118.325</b>	SAGINAW APP CON * <b>120.95 235.625</b>	GCO <b>121.725</b>	UNICOM <b>122.8</b> (CTAF) <b>0</b>
--------------------------	--	-----------------------	--

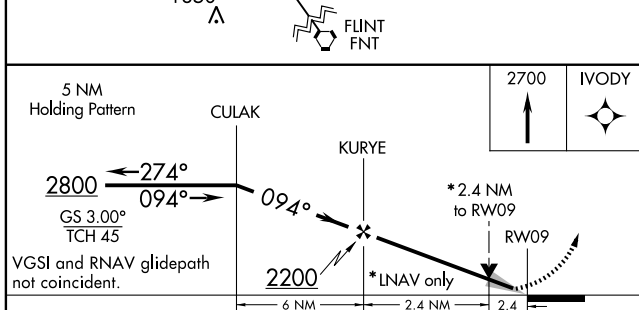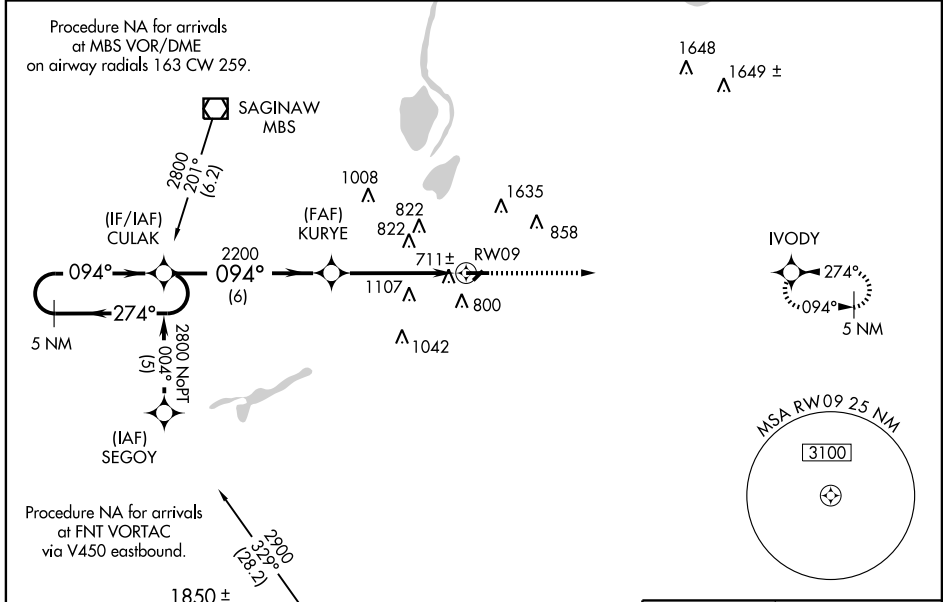

CATEGORY	A	B	C	D
LPV DA	850- $\frac{3}{4}$	250 (300- $\frac{3}{4}$ )		NA
LNAV/VNAV DA	1095-1 $\frac{3}{4}$	495 (500-1 $\frac{3}{4}$ )		NA
LNAV MDA	1380-1 780 (800-1)	1380-1 $\frac{1}{4}$ 780 (800-1 $\frac{1}{4}$ )	1380-2 $\frac{1}{4}$ 780 (800-2 $\frac{1}{4}$ )	NA
CIRCLING	1380-1 779 (800-1)	1380-1 $\frac{1}{4}$ 779 (800-1 $\frac{1}{4}$ )	1380-2 $\frac{1}{4}$ 779 (800-2 $\frac{1}{4}$ )	NA



EC-1, 26 AUG 2010 to 23 SEP 2010