

# RNAV (GPS) RWY 9



SAGINAW COUNTY H. W. BROWNE (HYX)

WAAS CH <b>50200</b> <b>W09A</b>	APP CRS <b>094°</b>	Rwy Idg TDZE Apt Elev	<b>5000</b> <b>600</b> <b>601</b>
----------------------------------------	------------------------	-----------------------------	-----------------------------------------


**▼** Circling to Rwy 5 NA at night. When local altimeter setting not received, use Saginaw MBS Intl altimeter setting and increase all DA 36 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ mile, increase all MDA 40 feet, increase LNAV visibility Cat C ¼ mile and Circling visibility Cat C ¼ mile. **▲** VDP and Baro-VNAV NA when using Saginaw MBS Intl altimeter setting. For uncompensated Baro-VNAV system, procedure NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.

**MISSED APPROACH:**  
Climb to 2700 direct IVODY and hold.

AWOS-3 <b>118.325</b>	SAGINAW APP CON * <b>120.95 235.625</b>	GCO <b>121.725</b>	UNICOM <b>122.8</b> (CTAF) <b>0</b>
--------------------------	--------------------------------------------	-----------------------	----------------------------------------

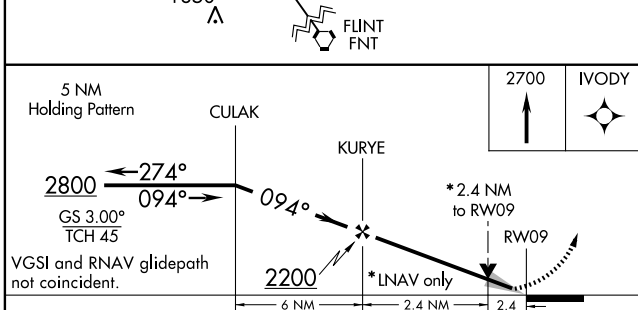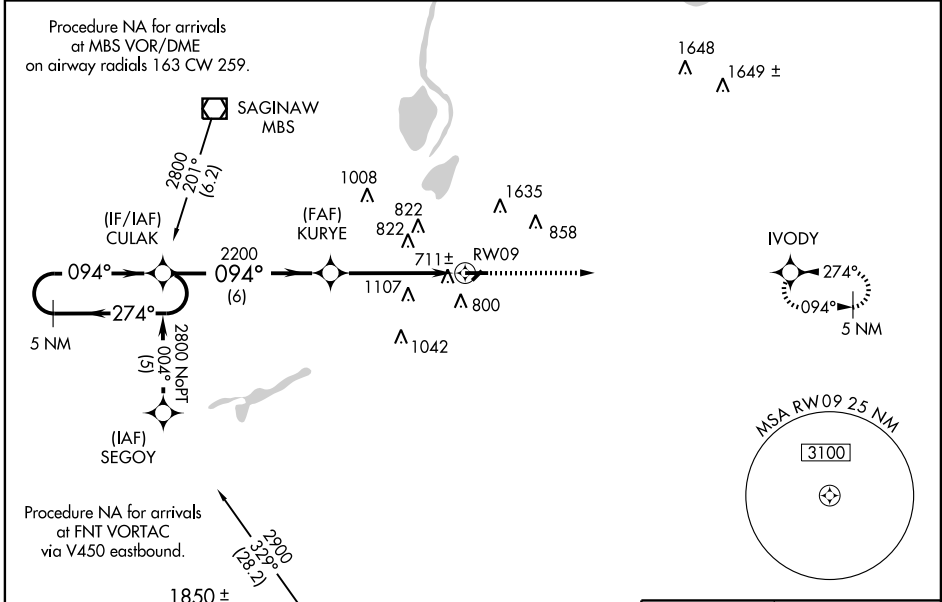

CATEGORY	A	B	C	D
LPV DA	850-1¾	250 (300-¾)		NA
LNAV/VNAV DA	1095-1¾	495 (500-1¾)		NA
LNAV MDA	1380-1 780 (800-1)	1380-1¼ 780 (800-1¼)	1380-2¼ 780 (800-2¼)	NA
CIRCLING	1380-1 779 (800-1)	1380-1¼ 779 (800-1¼)	1380-2¼ 779 (800-2¼)	NA

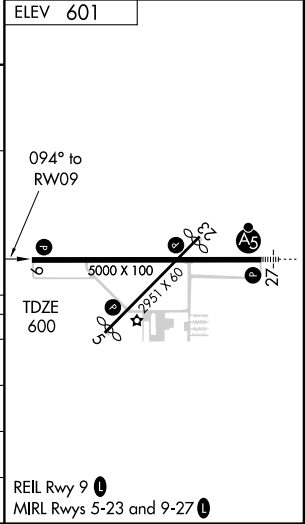

EC-1, 12 JAN 2012 to 09 FEB 2012

EC-1, 12 JAN 2012 to 09 FEB 2012